
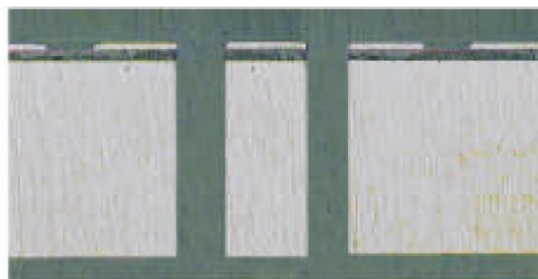




CONSTRUCCIONES ALUMINIO IMS / IMS BUILD UP'S

CIRCUITO 1 CARA / 1 SIDE PCB

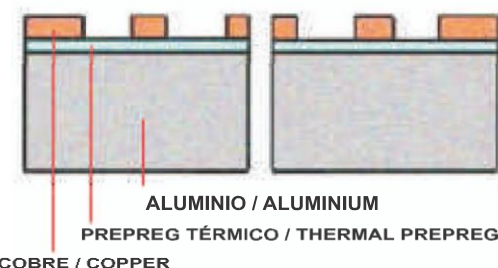


Esesor/Thickness Al: 1.0-1.6mm
Esesor/Thickness Cu: 35 μ -70 μ
Taladro minimo/Min drill: 1mm
Anchura conductor min/Min conductor width: 0.2mm
Espacio conductor min/Min conductor space: 0.2mm
Corona minima/Min annular ring: 0.2mm

CIRCUITO 1 CARA TALADRO AISLADO / 1 SIDE PCB ISOLATED HOLE

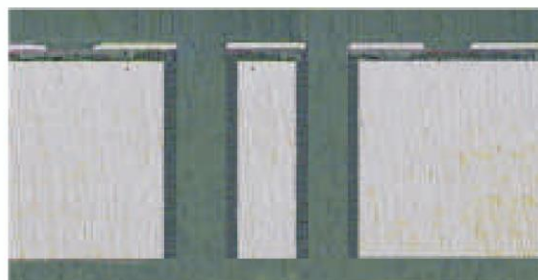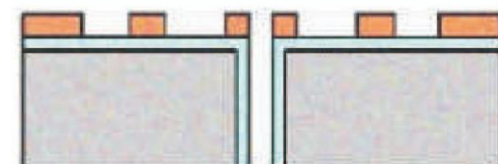



Esesor/Thickness Al: 1.0-1.4mm
Esesor/Thickness Cu: 35 μ -70 μ
Taladro minimo/Min drill: 1mm
Anchura conductor min/Min conductor width: 0.2mm
Espacio conductor min/Min conductor space: 0.2mm
Corona minima/Min annular ring: 0.2mm

CIRCUITO 1 CARA CON ABERTURA EN ALUMINIO
1 SIDE PCB WITH ALUMINIUM OPENING

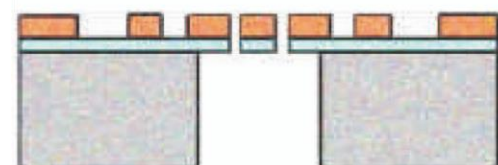



Esesor/Thickness Al: 1.0-1.4mm
Esesor/Thickness Cu: 35 μ -70 μ
Taladro minimo/Min drill: 1mm
Anchura conductor min/Min conductor width: 0.2mm
Espacio conductor min/Min conductor space: 0.2mm
Corona minima/Min annular ring: 0.2mm
Abertura maxima/Max opening: 10x10mm
(Consultar/Ask)

CIRCUITO 2 CARAS PTH CON ABERTURA EN ALUMINIO
2 SIDES PTH PCB WITH ALUMINIUM OPENING

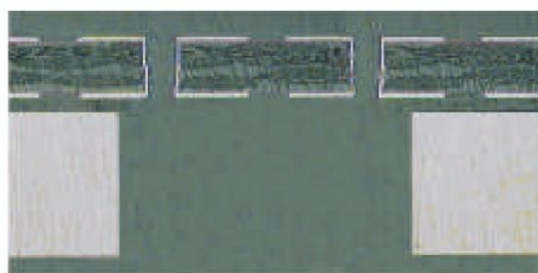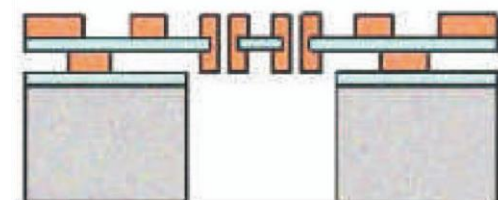

Esesor/Thickness Al: 1.0-1.4mm
Esesor/Thickness FR4: 0.35-0.5mm
Esesor/Thickness Cu: 35 μ -70 μ
Taladro minimo/Min drill (pth): 0.2mm
Taladro minimo/Min drill (npth) : 1mm
Anchura conductor min/Min conductor width: 0.2mm
Espacio conductor min/Min conductor space: 0.2mm
Corona minima/Min annular ring: 0.2mm
Abertura maxima/Max opening: 10x10mm
(Consultar/Ask)

CIRCUITO 2 CARAS PTH CON NÚCLEO DE ALUMINIO
2 SIDES PTH PCB WITH ALUMINIUM CORE

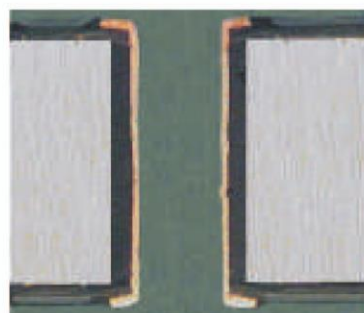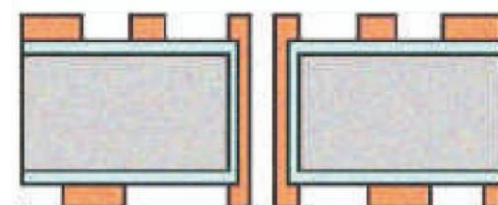

Esesor/Thickness Al: 1.0-1.4mm
Esesor/Thickness Cu: 35 μ -70 μ
Taladro minimo/Min drill via (pth): 0.3mm
Espacio minimo entre vias/
Min space between vias: 1.2mm
Taladro minimo/Min drill (npth) : 1mm
Anchura conductor min/Min conductor width: 0.2mm
Espacio conductor min/Min conductor space: 0.2mm
Corona minima/Min annular ring: 0.2mm