



IMS 1 CARA/IMS 1 SIDE

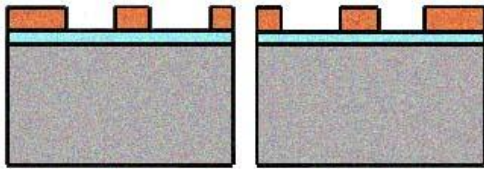

- ALUMINIO / ALUMINIUM
- PREPREG TERMICO / THERMAL PREPREG
- COBRE / COPPER

Espesor/Thickness Al: 1.0 - 1.6mm
Espesor/Thickness Cu: 35 - 70
Taladro minimo/Min drill: 1mm
Anchura conductor min/Min conductor width: 0.15mm
Espacio conductor min/Min conductor space: 0.15mm
Corona minima/Min annular ring: 0.18mm


IMS 1 CARA TALADRO AISLADO/IMS 1 SIDE ISOLATED HOLE

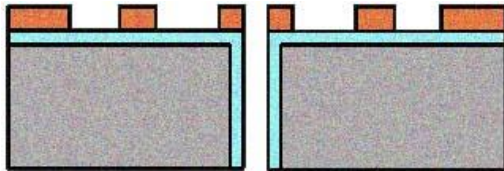

- ALUMINIO / ALUMINIUM
- PREPREG TERMICO / THERMAL PREPREG
- COBRE / COPPER

Espesor/Thickness Al: 1.0 - 1.4mm
Espesor/Thickness Cu: 35 - 70
Taladro minimo/Min drill: 1mm
Anchura conductor min/Min conductor width: 0.15mm
Espacio conductor min/Min conductor space: 0.15mm
Corona minima/Min annular ring: 0.18mm


IMS 1 CARA CON ABERTURA EN ALUMINIO/IMS 1 SIDE WITH ALUMINIUM OPENING

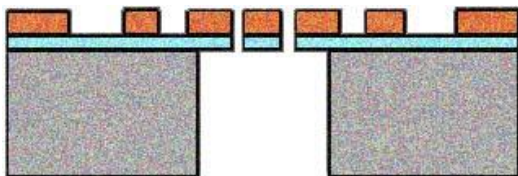

- ALUMINIO / ALUMINIUM
- PREPREG TERMICO / THERMAL PREPREG
- COBRE / COPPER

Espesor/Thickness Al: 1.0 - 1.4mm
Espesor/Thickness Cu: 35 - 70
Taladro minimo/Min drill: 1mm
Anchura conductor min/Min conductor width: 0.15mm
Espacio conductor min/Min conductor space: 0.15mm
Corona minima/Min annular ring: 0.18mm
Abertura maxima/Max opening: 10x10mm


IMS 2 CARAS PTH CON BASE ALUMINIO/IMS 2 SIDES PTH BASE ALUMINIUM

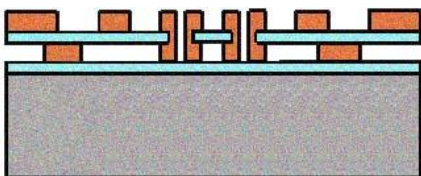

- ALUMINIO / ALUMINIUM
- PREPREG TERMICO / THERMAL PREPREG
- COBRE / COPPER

Espesor/Thickness Al: 1.0 - 1.4mm
Espesor/Thickness FR4: 0.35 - 0.5mm
Espesor/Thickness Cu: 35 - 70
Taladro minimo/Min drill (pth): 0.2mm
Taladro minimo/Min drill (npth) : 1mm
Anchura conductor min/Min conductor width: 0.15mm
Espacio conductor min/Min conductor space: 0.15mm
Corona minima/Min annular ring: 0.18mm

IMS 2 CARAS PTH CON NUCLEO DE ALUMINIO/IMS 2 SIDES WITH ALUMINIUM CORE



- ALUMINIO / ALUMINIUM
- PREPREG TERMICO / THERMAL PREPREG
- COBRE / COPPER

Espesor/Thickness Al: 1.0 - 1.4mm
Espesor/Thickness FR4: 0.35 - 0.5mm
Espesor/Thickness Cu: 35 - 70
Taladro minimo/Min drill via (pth): 0.3mm
Espacio minimo entre vias/Min space between vias: 1.2mm
Taladro minimo/Min drill (npth) : 1mm
Anchura conductor min/Min conductor width: 0.15mm
Espacio conductor min/Min conductor space: 0.15mm
Corona minima/Min annular ring: 0.18mm